


Rafe 12W Track Light Dimmable WH

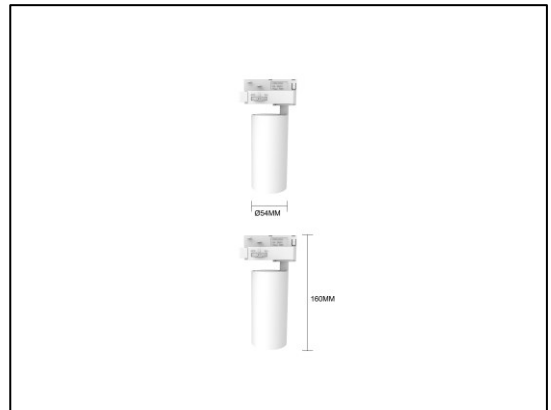

MODEL	CS-CGD-LR1026R-01 SMD-12W-3000K-60D-WH CS-CGD-LR1026R-01 SMD-12W-4000K-60D-WH CS-CGD-LR1026R-01 SMD-12W-6000K-60D-WH	SDCM	<6
LED BRAND & TYPE	EPISTAR SMD 3030	UGR	<19
INPUT VOLTAGE (V)	220-240V; 50/60Hz	HOUSING COLOUR	WHITE
PROTECTION CALSS	CLASS I	MATERIAL	ALUMINUM
IC-4 RATED (Y/N)	YES	IP	IP20
POWER FACTOR (PF)	0.9	OPERATING TEMPERATURE (°C)	-20°C to +40°C
WATTAGE (W)	12W	DIMMABLE (Y/N)	YES
FLICKER FREE (Y/N)	YES	DIMMING TYPE	TRIAC DIMMING
LUMEN OUTPUT (LM)	1,080LM	INSTALLATION TYPE	4 PHASE 3 CIRCUIT UNIVERSAL TRACK
EFFICACY (LM/W)	90LM/W	DIMENSION (mm)	SEE DIMENSION DRAWING
COLOUR TEMPERATURE (K)	3000K / 4000K / 6000K	NET WEIGHT (kg)	0.32kg
BEAM ANGLE (°)	60°	LIFESPAN (hr.) @L70B50	50,000 HR
ANGLE OF ROTATION	350° HORIZONTALLY, 45° DOWNWARDS and 18° UPWARDS	WARRANTY (yr.)	3 YEARS
CRI (Ra)	90	COMPLIANCE	SAA