


## VERTEX OP LED Dimmer Rotatory

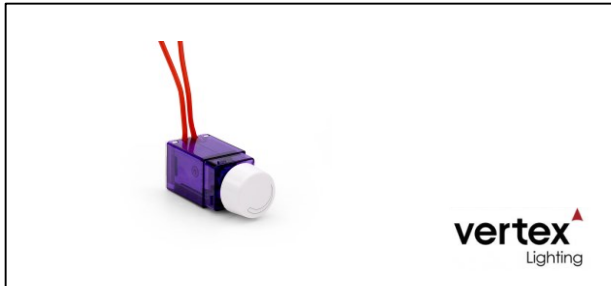

|                                  |   |  |   |
|----------------------------------|---|--|---|
| <b>Model</b>                     | CS-OP-AU-RD350VA  | <b>Dimmer Type</b>                           | Trailing edge   |
| <b>Fixing Mode</b>               | Clip-in   | <b>Colour Tint</b>                           | Purple  |
| <b>Surface Finish</b>            | Glossy  | <b>Ambient Air Temperature for Storage</b>   | 0 to +60 °C   |
| <b>Dimmer Control</b>            | 315° rotary setting   | <b>Rated Operational Current</b>             | 1.5A  |
| <b>Rated Operational Voltage</b> | 220...240VAC; 50Hz  | <b>Minimum Load</b>                          | 5W  |
| <b>Derated Value Per Dimmer</b>  | 350W  | <b>Load Type</b>                             | Dimmable LED 150W (240 V AC)<br>Incandescent 350W (240 V AC)<br>Low voltage halogen lamp with electronic transformer 350W (240 V AC)<br>Dimmable fluocompact lamp 150W (240 V AC)<br>Dimmable fluorescent 150W (240 V AC) |
| <b>Derating Factor</b>           | Number of devices 1 350W without derating<br>Number of devices 2 300W with derating<br>Number of devices 3 250W with derating | <b>Function Available</b>                    | Brightness adjustment   |
| <b>Protection Type</b>           | Over temperature  | <b>Control Type</b>                          | Rotary knob   |
| <b>Connections</b>               | Flying leads  | <b>Wiring Device Mounting</b>                | Iconic clip with locking bar  |
| <b>Material</b>                  | PC  | <b>Size</b>                                  | H56.22 x W23.10 x D23.10 mm   |
| <b>Embedding Depth</b>           | 38.80mm   | <b>Ambient Air Temperature for Operation</b> | 0 to +45 °C   |
| <b>Relative Humidity</b>         | 0...90%   | <b>Warranty</b>                              | 3 yrs.  |