


## Rafe 33W Surface Mount Downlight IP65 BK

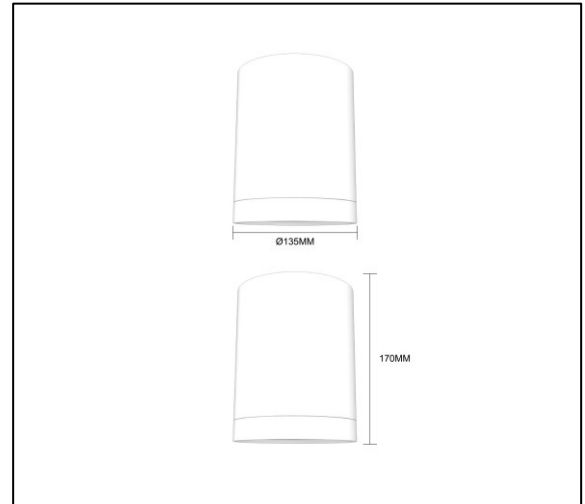

<b>MODEL</b>	CS-CGD-LC1518R-01-33W-3000K-60D-IP65-BK CS-CGD-LC1518R-01-33W-4000K-60D-IP65-BK CS-CGD-LC1518R-01-33W-5000K-60D-IP65-BK	<b>UGR</b>	<19
<b>LED BRAND AND TYPE</b>	Bridgelux COB	<b>HOUSING COLOUR</b>	BK
<b>INPUT VOLTAGE (V)</b>	220-240V; 50/60Hz	<b>MATERIAL</b>	ALUMINUM
<b>PROTECTION CALSS</b>	CLASS I	<b>IP</b>	65
<b>IC-4 RATED (Y/N)</b>	YES	<b>IK</b>	N/A
<b>POWER FACTOR (PF)</b>	0.9	<b>OPERATING TEMPERATURE (°C)</b>	-20°C to +40°C
<b>WATTAGE (W)</b>	33W	<b>DIMMABLE (Y/N)</b>	Yes
<b>FLICKER FREE (Y/N)</b>	YES	<b>DIMMING TYPE</b>	Traic-dimming
<b>LUMEN OUTPUT (LM)</b>	2970LM	<b>INSTALLATION TYPE</b>	SURFACE MOUNTED
<b>EFFICACY (LM/W)</b>	90LM/W	<b>DIMENSION (mm)</b>	Ø135 x H170 mm
<b>COLOUR TEMPERATURE (K)</b>	3000K / 4000K / 5000K	<b>NET WEIGHT (kg)</b>	1.6kg
<b>BEAM ANGLE (°)</b>	60°	<b>LIFESPAN (hr.) @L70B50</b>	50,000 HR
<b>CRI (Ra)</b>	90	<b>WARRANTY (yr.)</b>	3 YEARS
<b>SDCM</b>	<3	<b>COMPLIANCE</b>	SAA