

PRODUCT FEATURE

KEY FEATURE:

DEFIER AU Exit sign -**Suspended version**

LED emergency module suitable for suspension mounting

Complete set with integrated electronics, LED module, housing, and battery

Self-Test Function

Comes with both of Maintained or Non-maintained

24m viewing

Single or double sided

Polycarbonate white RAL 9016


Integral LiFePO4 battery pack

3.2V 1500mAH LiFePO4 battery

4-year guarantee (battery 2-year guarantee)

DEF-EXIT-PET Film's arrow: LEFT,RIGHT, EXIT, White blank , all 4 included

LAE 3W LED Emergency Exit Sign Light Self-testing Suspended

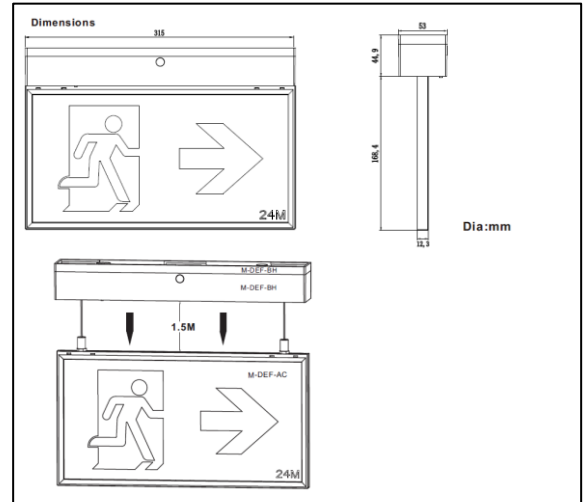

MODEL	CS-LAE-DEF2-MN1W16ST-2H-LI	UGR	N/A
LED BRAND & TYPE	SANAN SMD	HOUSING COLOUR	White
DRIVER BRAND & TYPE	LAE	MATERIAL	PC
INPUT VOLTAGE (V)	220-240	IP	20
PROTECTION CLASS	N/A	IK	04
IC-4 RATED (Y/N)	N/A	AMBIENT TEMPERATURE (°C)	0-40
SPD (KV)	N/A	OPERATING TEMPERATURE (°C)	0-40
POWER FACTOR (PF)	>0.5	DIMMABLE (Y/N)	N
WATTAGE (W)	3	DIMMING TYPE	N/A
FLICKER FREE (Y/N)	Y	INSTALLATION TYPE	Suspension mounting
LUMEN OUTPUT (LM)	90	CUT-OUT (mm)	N/A
EFFICACY (LM/W)	N/A	DIMENSION (mm)	315*53*(168.4~1500)
COLOUR TEMPERATURE (K)	6000	NET WEIGHT (kg)	0.6
BEAM ANGLE (°)	N/A	LIFESPAN (hr.) @L70B50	50000
CRI (Ra)	N/A	WARRANTY (yr.)	4 for Light.2 for battery
SDCM	N/A	COMPLIANCE	AS/NZS 2293, AS/NZS 60598, RCM, UN 38.3, IEC 62133